


Datasheet

Surge protection for information technology and telecommunication installations

SPD according to test category D1+C2

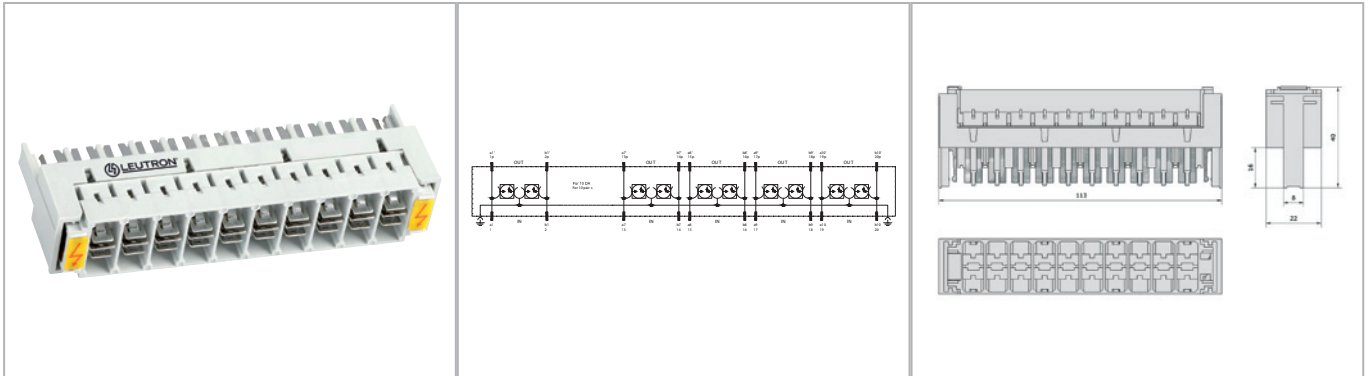

LSA surge voltage protection for two-electrode arresters (8x6 mm) for LSA (IDC) connection and disconnection modules.

• Empty magazine

Technical Data

TelPro LSA 2/10-2E 8x6

Nominal DC sparkover voltage	UagN	- V=
Impulse sparkover voltage at 1 kV/μs	Uas	- V
Nominal alternating discharge current	Iwn	- A
D1 lightning impulse current (10/350 μs)	Iimp	- kA
C2 nominal discharge current (8/20 μs)	In	- kA
C3 protection level line-PE at 1kV/μs	Up	- V
Capacitance, line-earth	C	- nF
Operating temperature range	TU	-40 - +80 °C
Net weight / pc		61 g

Order Data

Product	TelPro LSA 2/10-2E 8x6
Article-No.	24 01 06