


Datasheet

Surge protection for information technology and telecommunication installations

SPD according to test category D1+C2

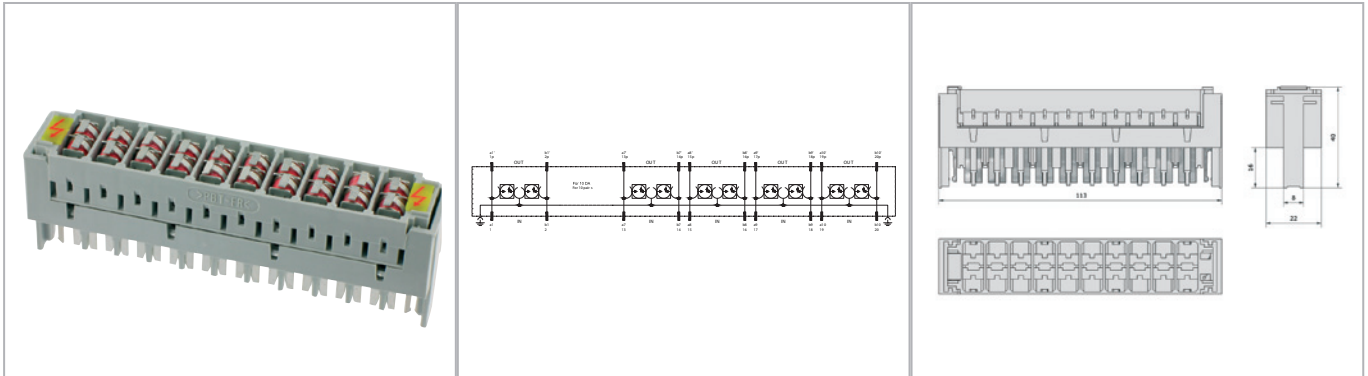

LSA surge voltage protection for two-electrode arresters (8x6 mm) for LSA (IDC) connection and disconnection modules.

- Magazines are fitted with 20 gas-filled surge arresters (GDT) each
- Integrated fail-safe function

Technical Data

TelPro LSA-2EH230F-10kA

Nominal DC sparkover voltage	UagN	230 V=
Impulse sparkover voltage at 1 kV/μs	Uas	< 650 V
Nominal alternating discharge current	Iwn	10 A
D1 lightning impulse current (10/350 μs)	Iimp	2,5 kA
C2 nominal discharge current (8/20 μs)	In	10 kA
C3 protection level line-PE at 1kV/μs	Up	≤ 650 V
Capacitance, line-earth	C	≤ 1,5 pF at 1MHz
Operating temperature range	TU	-40 - +80 °C
Net weight / pc		90 g

Order Data

Product	TelPro LSA-2EH230F-10kA
Article-No.	24 01 14