


# Datasheet

## EMC filter with integrated surge protection

### EnerProFilter

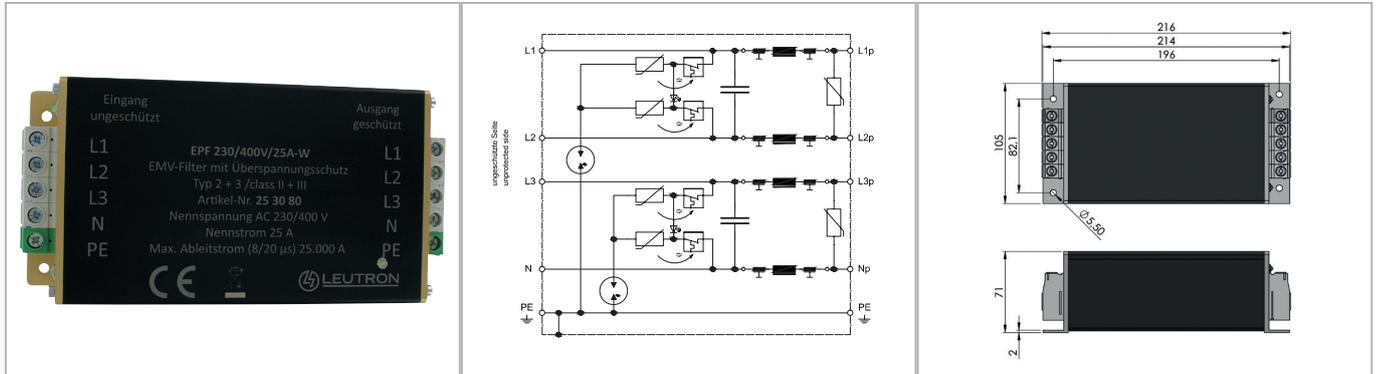

EMC filters with integrated overvoltage protection enable smooth operation of highly sensitive electronics in harsh environments. Suitable for the application in three-phase 230/400 V TN systems.

- Applicable at the boundaries LPZ 0B - 2 and higher
- 4-pole
- Leakage current-free
- Test standard: IEC 61643-11 / EN 61643-11
- Protects foundation earthing electrode against AC-caused corrosion
- To protect the supply of sensible equipment and installations
- Maximum impulse discharge current of 25 kA (8/20  $\mu$ s)
- EAC certification

Technical Data		EPF 230/400V/25A-W
IEC category		Type 2 + 3 / class II + III
Nominal voltage AC	UN	230 / 400 V~
Max. continuous operating voltage AC (50/60 Hz)	Uc	480 V~
Voltage protection level at 5 kA (8/20 $\mu$ s) or 1 kV/ $\mu$ s	Up	$\leq 1,4$ kV
Protection level at In (8/20 $\mu$ s); worst case	Up	$\leq 2$ kV
Nominal current	IL	25 A
Response time	tA	$\leq 25$ ns
Nominal discharge current (8/20 $\mu$ s)	In	15 kA
Max. impulse discharge current (8/20 $\mu$ s)	Imax	25 kA
Max. allowed fuse or back-up fuse		25 A gG
Operating temperature range	TU	-40 - +80 °C
Max. conductor cross section		single wire 10 mm <sup>2</sup> / flexible 6 mm <sup>2</sup>
Dimensions (L x W x H)		211 x 106 x 72 mm
Enclosure material / colour		Aluminum / black-gold
Degree of protection (IEC EN 60529)		IP 20
Mounting on		mounting plate
Power supply system		3 phase TN systems

### Order Data

Product	EPF 230/400V/25A-W
Article-No.	25 30 80