


# Datasheet

## EMC filter with integrated surge protection

### EnerProFilter

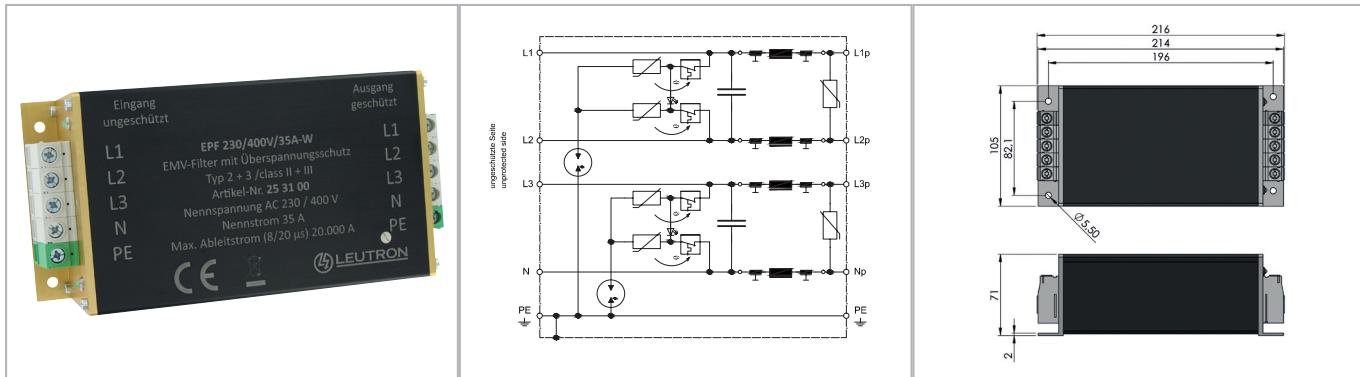

**EMC filters with integrated overvoltage protection enable smooth operation of highly sensitive electronics in harsh environments. Suitable for the application in three-phase 230/400 V TN systems.**

- Applicable at the boundaries LPZ 0B - 2 and higher
- 4-pole
- Leakage current-free
- Test standard: IEC 61643-11 / EN 61643-11
- Protects foundation earthing electrode against AC-caused corrosion
- To protect the supply of sensible equipment and installations
- Maximum impulse discharge current of 20 kA (8/20 µs)
- EAC certification

Technical Data		EPF 230/400V/35A-W
IEC category		Type 2 + 3 / class II + III
Nominal voltage AC	UN	230/400 V~
Max. continuous operating voltage AC (50/60 Hz)	Uc	275/480 V~
Voltage protection level at 5 kA (8/20 µs) or 1 kV/µs	Up	≤ 1,4 kV
Protection level at In (8/20 µs); worst case	Up	≤ 2 kV
Nominal current	IL	35 A
Response time	tA	< 25 ns
Nominal discharge current (8/20 µs)	In	15 kA
Max. impulse discharge current (8/20 µs)	I <sub>max</sub>	20 kA
Max. allowed fuse or back-up fuse		35 A gG
Operating temperature range	TU	-40 - +80 °C
Max. conductor cross section		16 mm <sup>2</sup> single wire / stranded
Dimensions (L x W x H)		216 x 105 x 71 mm
Enclosure material / colour		Aluminum / black-gold
Degree of protection (IEC EN 60529)		IP 20
Mounting on		mounting plate
Power supply system		3 phase TN systems

### Order Data

Product	EPF 230/400V/35A-W
Article-No.	25 31 00