


Surge protection of power supply

Lightning current arrester Type 1 for AC power supplies / PowerPro

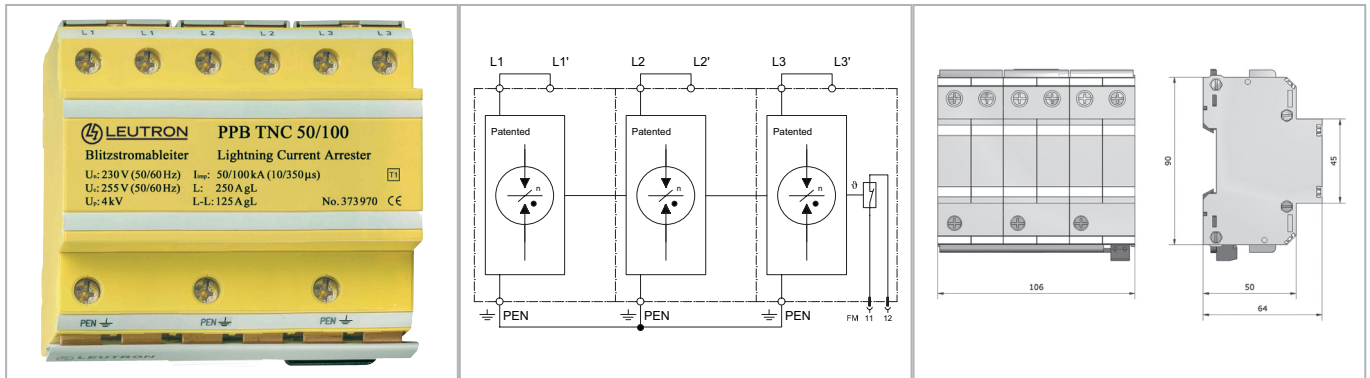

Lightning current discharge arrester (class I) with rare-gas-filled spark gap for the use in three-phase TNC systems. Applicable at the boundaries LPZ OA - 1 and higher

- Test standard: IEC 61643-11 / EN 61643-11
- High quenching of follow-on short-circuit currents
- High TOV resistance
- No leakage currents, thus, allowing installation upstream of power meters
- Degree of protection according to IEC EN 60529: IP 20
- Mounting on 35 mm DIN rail (EN 60715)
- EAC certification

Technical Data		PP B TNC 440/FM
IEC category		Type 1
Nominal voltage AC	UN	400/690 V~
Max. continuous operating voltage AC (50/60 Hz)	Uc	440 V~
Insulation resistance	Risol	>10 GΩ
Protection level at 100% lightn. imp. sparkover voltage (1.2/50 μs)	Up	≤ 4,0 kV
Protection level	Up	≤ 4,0 kV
Response time	tA	<50 ns
Lightning impulse current (10/350 μs) total	Itotal	75 kA
Lightning impulse current (10/350 μs) L-N/N-PE/L-PEN	limp	- / - / 25 kA
Follow-on current extinguishing capability at Uc (50/60 Hz)	Ifi	4 kA
Short-circuit withstand capability at max. back-up fuse	Ik	50 kAeff
Max. acceptable back-up fuse F2 (spur wiring)		63 A gG
Max. acceptable back-up fuse F1 (serial wiring)		63 A gG
Operating temperature range	TU	-40 - +80 °C
Max. conductor cross section		50mm ² stranded/35mm ² flexible
Recommended conductor cross section		25 mm ²
Max. connection torque for terminals		4,0 Nm
Enclosure material / colour		polycarbonate (halogen-free) UL 94-V0 / yellow
Switching capacity FM		250 V/2 A
Max. conductor cross section FM		1,5 mm ²

Order Data

Product	PP B TNC 440/FM
Article-No.	37 39 65