


Datasheet

Surge protection of power supply

SPD type 2 for AC power supplies / EL series

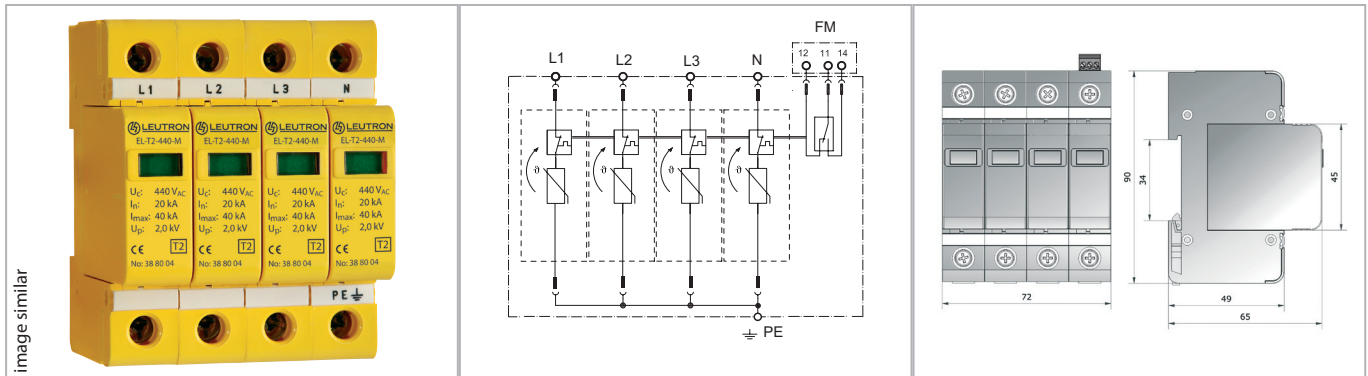

Fully pluggable surge protective arrester type 2 (class II) for the use in three-phase TNS systems. Complete module with 4+0 circuit.

- Test standard: IEC 61643-11 / EN 61643-11
- Vibration test standard: DIN EN 60068-2-6, IEC 60068-2-6
- Shock test standard: DIN EN 60068-2-27, IEC 60068-2-27
- Mounting on 35 mm DIN rail (EN 60715)
- With remote changeover contact (FM)

Technical Data		EL-T2/4+0-440-FM
IEC category		Type 2 / class II
Nominal voltage AC	UN	230 V~
Max. continuous operating voltage AC (50/60 Hz)	U_c	440 V~
Nominal discharge current (8/20 μ s)	I_n	20 kA
Max. impulse discharge current (8/20 μ s)	I_{max}	40 kA
Protection level at I_n (8/20 μ s)	U_p	$\leq 2,0\text{ kV}$
Protection level at 5 kA	U_p	$\leq 1,5\text{ kV}$
Short-circuit withstand capability at max. back-up fuse	I_k	25 kA _{eff}
Max. acceptable fuse or back-up fuse		125 A gG
Operating temperature range	TU	-40 - +80 °C
Min. conductor cross section at terminals		1.5 mm ² solid/flexible
Max. conductor cross section		35 mm ² stranded/25 mm ² flexible
Max. connection torque for terminals		3,5 Nm
Enclosure material / colour		Thermoplastic, yellow, UL 97 V-0
Degree of protection (IEC EN 60529)		IP 20
Dimension (DIN 43880)		4 TE
Max. operating voltage remote contact FM		250 V AC/125 V DC
Max. operating current remote contact FM		1 A AC/200 mA DC
Max. locking torque FM terminals		0,25 Nm
Composed of: number of modules		4x 38 80 04

Order Data	
Product	EL-T2/4+0-440-FM
Article-No.	38 81 04