


# Datasheet

## Surge protection of power supply

### Combined arrester type 1 + 2 for AC power supplies / IsoPro

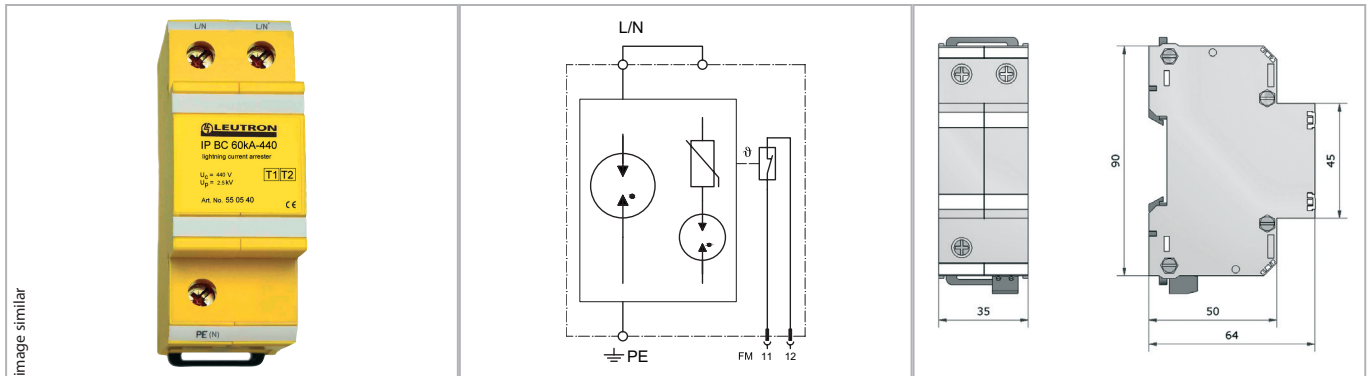

Single pole SPD type 1 + 2 (class I+II) for TN net systems.

- Test standard: IEC 61643-11 / EN 61643-11
- Class I+II (T1+T2) Combined Arresters
- Mounting on 35 mm DIN rail (EN 60715)
- Degree of protection according to IEC EN 60529: IP 20
- FM contact: break contact

Technical Data		IP BC 60/FM-440
IEC category		Type 1 + 2 / class I+II
Nominal voltage AC	UN	250/440 - 400/690 V~
Max. continuous operating voltage AC (50/60 Hz)	Uc	440 V~
Protection level at 100% lightn. imp. sparkover voltage (1.2/50 µs)	Up	≤ 2,5 kV
Protection level	Up	≤ 2,5 kV
Response time	tA	<50 ns
Lightning impulse current (10/350 µs) total	I <sub>total</sub>	60 kA
Lightning impulse current (10/350 µs) L-N/N-PE/L-PEN	I <sub>imp</sub>	60 / - / - kA
Short-circuit withstand capability at max. back-up fuse	I <sub>k</sub>	50 kA <sub>eff</sub>
Max. acceptable back-up fuse F2 (spur wiring)		160 A gG
Max. acceptable back-up fuse F1 (serial wiring)		125 A gG
Operating temperature range	TU	-40 - +80 °C
Max. conductor cross section		50 mm <sup>2</sup> stranded/35 mm <sup>2</sup> flexible
Recommended conductor cross section		25 mm <sup>2</sup>
Max. connection torque for terminals		4,0 Nm
Enclosure material / colour		polycarbonate (halogen-free) UL 94-V0 / yellow
FM contact / contact type		break contact
Switching capacity FM		250 V/2 A
Max. conductor cross section FM		1,5 mm <sup>2</sup>
Max. locking torque FM terminals		0,25 Nm

Order Data	
Product	IP BC 60/FM-440
Article-No.	55 05 41