


# Datasheet

## Surge protection of power supply

### Combined arrester type 1 + 2 for AC power supplies / CT series

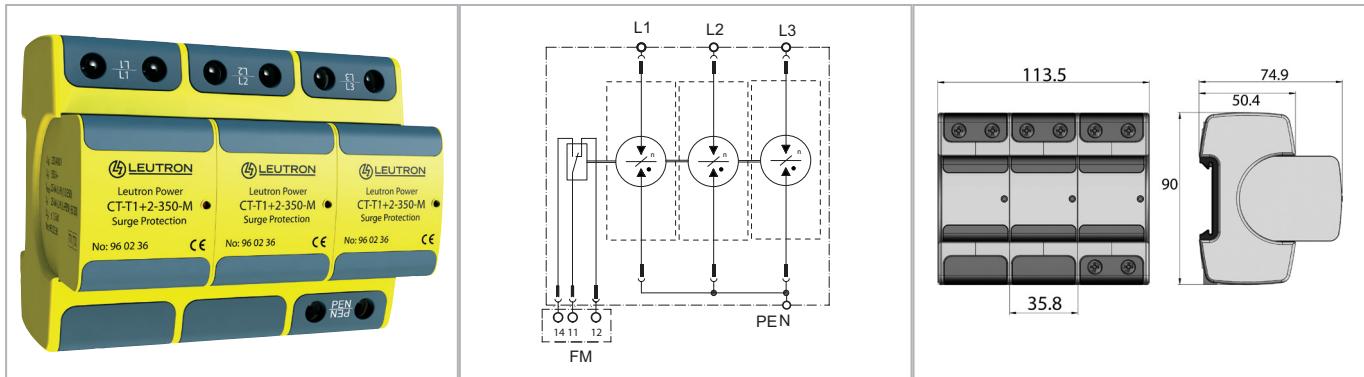

**Lightning current discharge arrester with rare-gas-filled spark gap and very low protection level < 1.5 kV for the use in three-phase TNC systems.** They provide extremely high discharge capacity with at the same time very low protection levels and they also do not need any damageable internal or external electronic trigger.

- Applicable at the boundaries LPZ OA - 2
- Test standard: IEC 61643-11 / EN 61643-11
- Mounting on 35 mm DIN rail (EN 60715)
- Enclosure material: thermoplastic with the colors yellow and black
- Degree of protection according to IEC EN 60529: IP 20
- Inflammability class according to UL 94 V0
- No leakage currents, thus, allowing installation upstream of power meters
- Vibration test standard: DIN EN 60068-2-6, IEC 60068-2-6
- Shock test standard: DIN EN 60068-2-27, IEC 60068-2-27
- Optical status indication (red pin appears)
- Single modules can be replaced easily
- Remote changeover contact
- Max. operating voltage remote contact: 250 V AC/125 V DC
- Max. operating current remote contact: 1 A AC/200 mA DC
- EAC certification

Technical Data		CT-T1+2/3+0-350-FM
IEC category		Type 1 + 2 / class I+II
Nominal voltage AC	UN	230/400 V~
Max. continuous operating voltage AC (50/60 Hz)	Uc	350 V~
Lightning impulse current (10/350 µs) total	Itotal	75 kA
Lightning impulse current (10/350 µs) L-N/N-PE/L-PEN	limp	- / - / 25 kA
Nominal discharge current (8/20 µs) L-N/N-PE/L-PEN	In	- / - / 25 kA
Protection level	Up	≤ 1,5 kV
Follow-on current extinguishing capability AC L-N (260 V AC)	Ifi	4 kAeff
Short-circuit withstand capability at max. back-up fuse	ISCCR	50 kAeff
Max. acceptable backup fuse (branch wiring)		250 A gG
Max. acceptable backup fuse (V-type through wiring)		125 A gG
Operating temperature range	TU	-40 - +80 °C
Min. conductor cross section at terminals		10 mm² solid/flexible
Max. conductor cross section		50 mm² stranded/35 mm² flexible
Recommended conductor cross section		25 mm²
Max. connection torque for terminals		4,0 Nm
Power supply system		3 phase TNC systems
Composed of: number of moduls		3x 960236
Installation width		113,5 mm
Max. conductor cross section FM		1,5 mm²

### Order Data

Product	CT-T1+2/3+0-350-FM
Article-No.	96 00 03