


Datasheet

Surge protection of power supply

Lightning current arrester Type 1 for AC power supplies / CT Series

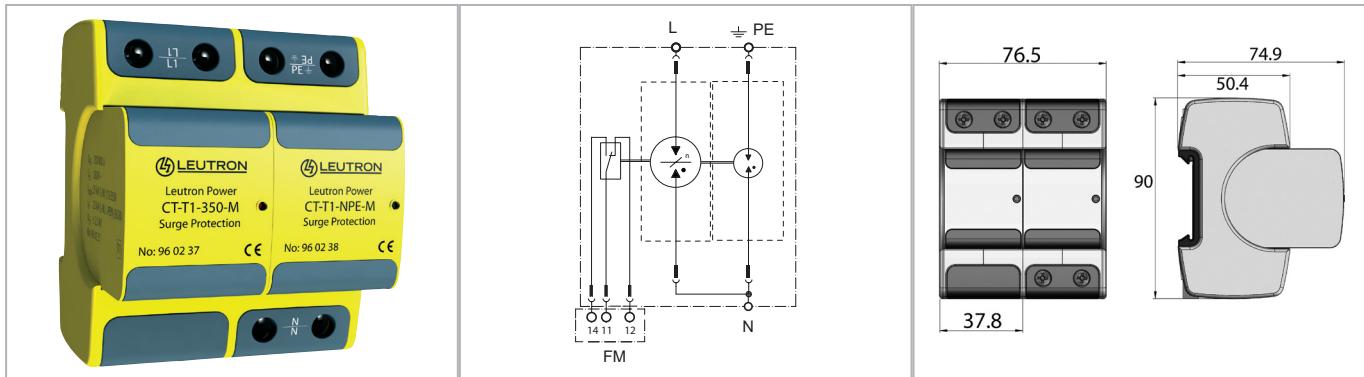

Lightning current discharge arrester (class I) with rare-gas-filled spark gap for the use in single-phase TT and TN systems. They provide extremely high discharge capacity with at the same time very low protection levels and they also do not need any damageable internal or external electronic trigger.

- Applicable at the boundaries LPZ OA - 1
- Test standard: IEC 61643-11 / EN 61643-11
- Vibration test standard: DIN EN 60068-2-6, IEC 60068-2-6
- Shock test standard: DIN EN 60068-2-27, IEC 60068-2-27
- Mounting on 35 mm DIN rail (EN 60715)
- Enclosure material: thermoplastic with the colors yellow and black
- Degree of protection according to IEC EN 60529: IP 20
- Inflammability class according to UL 94 VO
- No leakage currents, thus, allowing installation upstream of power meters
- Optical status indication (red pin appears)
- Single modules can be replaced easily
- Remote changeover contact
- Max. operating current remote contact: 1 A AC/200 mA DC
- EAC certification

Technical Data

CT-T1/1+1-350-FM	
IEC category	Type 1
Nominal voltage AC	UN 230/400 V~
Max. continuous operating voltage AC (50/60 Hz)	Uc 350 V~
Lightning impulse current (10/350 µs) total	I _{total} 50 kA
Lightning impulse current (10/350 µs) L-N/N-PE/L-PEN	I _{imp} 25 / 50 / - kA
Nominal discharge current (8/20 µs) L-N/N-PE/L-PEN	I _n 25 / 50 / - kA
Protection level	Up ≤ 2,5 kV
Follow-on current extinguishing capability AC L-N (260 V AC)	I _{fi} 10 kAeff
Short-circuit withstand capability at max. back-up fuse	ISCCR 50 kAeff
Max. acceptable backup fuse (branch wiring)	250 A gG
Max. acceptable backup fuse (V-type through wiring)	125 A gG
Operating temperature range	TU -40 - +80 °C
Min. conductor cross section at terminals	10 mm ² solid/flexible
Max. conductor cross section	50 mm ² stranded/35 mm ² flexible
Recommended conductor cross section	25 mm ²
Max. connection torque for terminals	4,0 Nm
Power supply system	1 phase TT and TNS systems
Composed of: number of moduls	1x 96 02 37 + 1x 96 02 38
Installation width	76,5 mm
Max. operating voltage remote contact FM	250 V AC/125 V DC

Order Data

Product	CT-T1/1+1-350-FM
Article-No.	96 02 15