


Datasheet

Surge protection for measuring systems and automatic control devices

Pluggable SPD with high discharge capability and low protection level for MCR applications

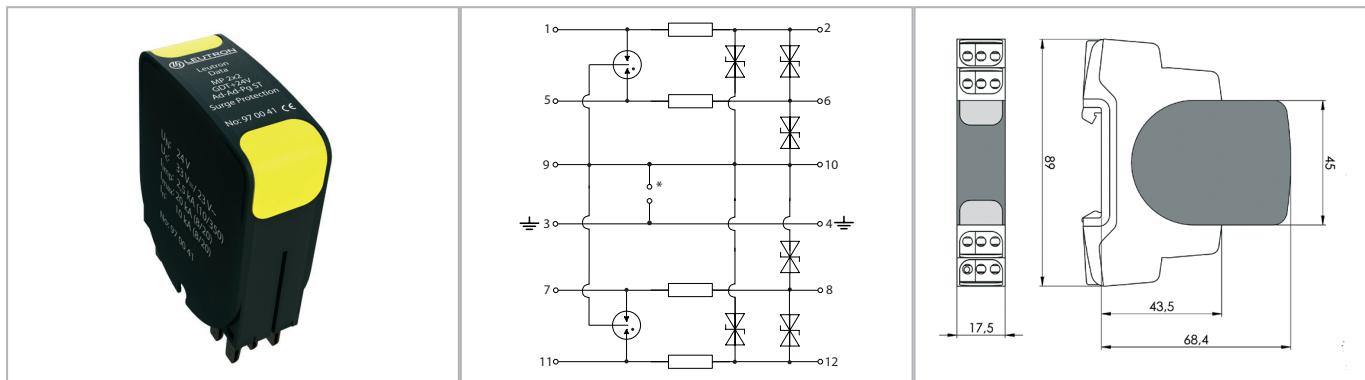

Fully pluggable two-parts arrester for signal lines. The protective module can be removed for test or maintenance purposes without changing the line impedance and therefore influencing the signal level. The base part can remain in the installation without manipulating or removing any wire.

- Protective circuit for 4 signal lines with common ground
- Protective plug can be removed without changing the line impedance or influencing the useful signal
- Test standard: IEC 61643-21 / EN 61643-21
- Vibration test standard: DIN EN 60068-2-6, IEC 60068-2-6
- Shock test standard: DIN EN 60068-2-27, IEC 60068-2-27
- Applicable at the boundaries LPZ 0B - 2 and higher
- Mounting on 35 mm DIN rail (EN 60715)
- Enclosure material: thermoplastic
- Space required for installation: 17.5 mm

Technical Data

MP 2x2 GDT+24V-Ad-Ad-Pg ST	
IEC category/EN type	D1 / C2 / C1 / C3
Nominal voltage DC	UN 24V=
Max. continuous operating voltage (DC/AC)	Uc 33/23V
Nominal current	IL 0,5 A
D1 lightning impulse current (10/350) per line	Iimp 2,5 kA
C2 nominal discharge current (8/20 µs) total	Imax 20 kA
C2 nominal discharge current (8/20 µs) per line	In 10 kA
Protection level line-line at limp D1	Up ≤ 52V
Protection level line-earth at limp D1	Up ≤ 66V
Protection level line-line at 1 kV/µs C3	Up ≤ 45V
Protection level line-Pg at 1 kV/µs C3	Up ≤ 45V
Series resistance per line	2,2Ω
Max. operating frequency (-3 dB)	fG typ. 6,0 MHz
Conductor cross section (solid/stranded/AWG)	0,2-4,0/0,2-2,5 mm ² / 24-12
Operating temperature range	TU -40 - +80 °C
Inflammability class according to UL 94	V0
Degree of protection (IEC EN 60529)	IP 20
Enclosure material / colour	PA6 / black-yellow
Dimension (DIN 43880)	17,5 mm (1TE)
Mounting on	35 mm DIN rail (EN 60715)

Order Data

Product	MP 2x2 GDT+24V-Ad-Ad-Pg ST
Article-No.	97 00 41